


Technical Data Sheet

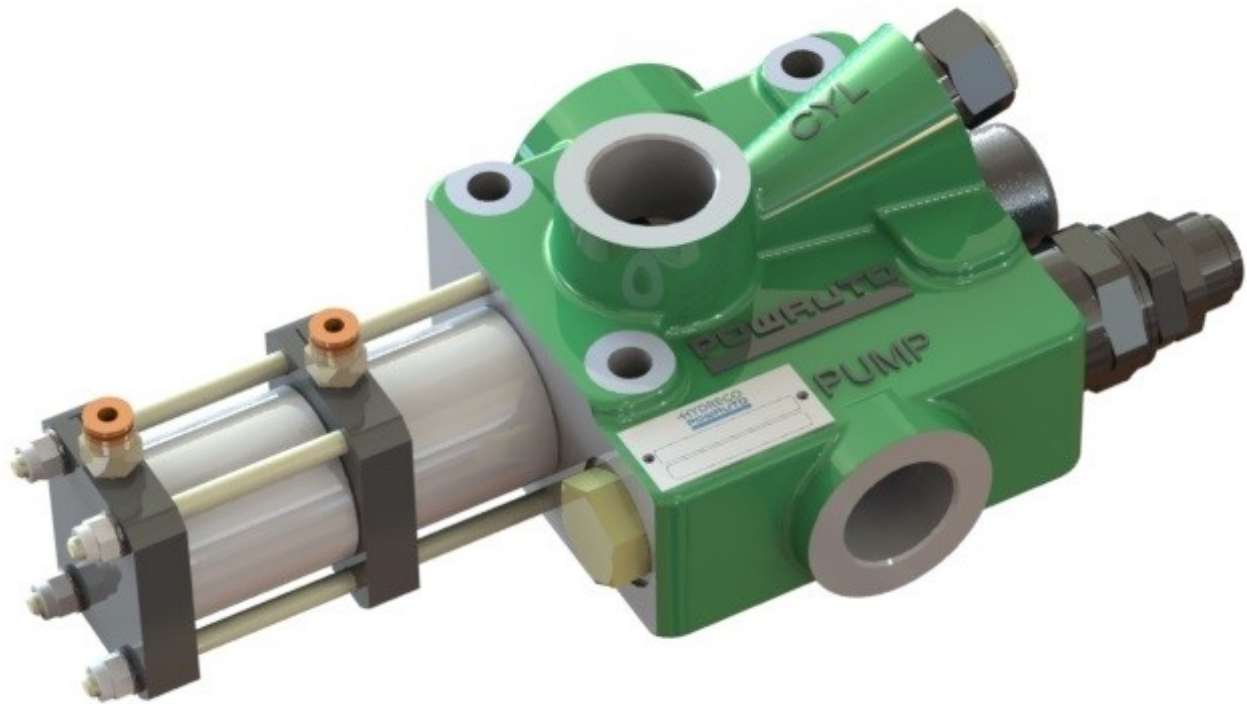

I05 SERIES TIPPING VALVE

Single Spool Tipping Valves

The I05 Valve has been designed in response to the changing needs of the modern truck market.

These valves provide another option for truck or trailer tipping applications where compact size is required in conjunction with high flow rates.

Used in conjunction with a proportional air control (e.g. CK90A) the valve controls the rate of lowering.

Suits:

Truck or trailer tipping applications.

Options:

Service port pressure switches.

Two Speed Lowering via electropneumatic control.

Dual Pressure Relief Valve

Product Features

- **Hard Chrome Metering Spools**
Combine with the load hold check valve to provide load independent, proportional control.
- **Monoblock Construction**
For maximum strength and integrity, allowing for repeatability and long life.
- **Air Operated**
For ease of engagement remotely via pneumatic or electro pneumatic control.
- **Optional Pressure Switch**
For use as a body up alarm etc.
- **Extra Large Galleries and Spools**
To allow for larger flow capacities with extremely low pressure drops.
- **High Flow Rates**
Lowest pressure drop compared to competitors at high flows. Allows for more cycles per day.





HYDRECO
a member of **DAIKIN** group



www.hydreco.com

Technical Data Sheet

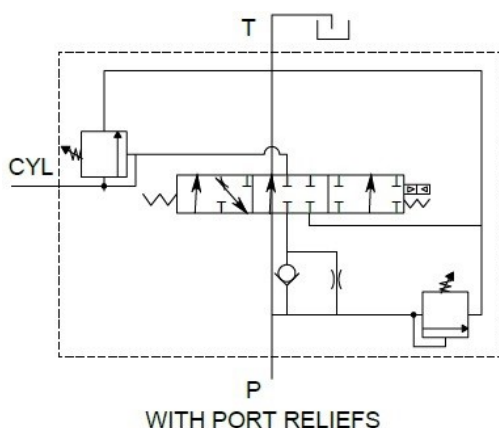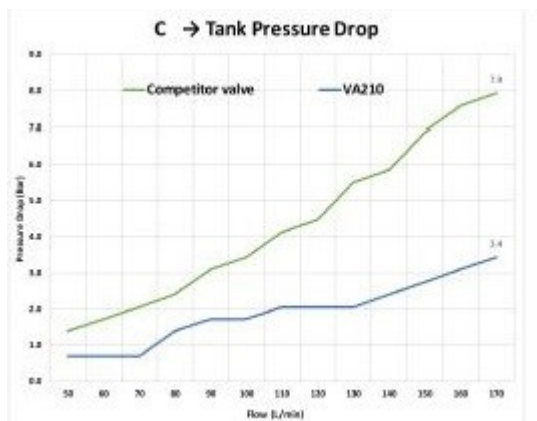

VALVE DESIGNATION CODES

I05 series valve

VA I05 A I22I C

Identifier

VA = Valve

Valve Series

I05

Engagement Type

A = Air

Relief Pressure Range (Bar)

I22I = 120 - 210 (1700 - 3000psi)

I234 = 120 - 345 (1700 - 5000psi)

Features

A = Std + Service Port Switch

B = Std (Metering Spool Only)

C = Std + Service Port Switch + Two Speed Lower

D = Std + Two Speed Lower

E = Std + Port Relief

F = Std + Port Relief + Two Speed Lower

G = Std + Two Pressure Relief Valve

H = Std + Service Port Switch + Two Pressure Relief Valve

Technical Specifications		VAI05A1234B
Number of Spools		I
Action		Single Acting
Maximum Pressure	Bar / psi	345 / 5000
Pressure Drop @ 170LPM C-T	Bar / psi	3.4 / 49.3
Base Valve Mass	kg	7
Port Sizes - PUMP & CYL		1" BSPP
Port Size - TANK		1 1/4" BSPP
Dual PRV Adjusting Tool	38/30 AF	90000288
Dual PRV Adjusting Tool	41/32 AF	90000289
Pressure Switch (Optional)		49700051B

Spare Parts	
Description	Item Number
Seal Kit (does not include 430001 I2G piston)	SK I20A
Seal Kit (includes 430001 I2G piston)	SK I20C
Air Shift Repair Kit -All Seals	RK009A
Air Shift Repair Kit -Piston, Piston Rod & Nut	RK009C
Spring Retainer Spacer - Outer	28000600
Spring Retainer Spacer - Inner	28000601
Valve Centering Spring	35000205
Piston Rod	37000092
Spool Retainer Screw	48000773
Air Shift Cylinder Barrel	49000142

Note: Hydreco recommends the use of filtration in all hydraulic circuits to a maximum of 25µm.





HYDRECO
a member of **DAIKIN** group



www.hydreco.com

Technical Data Sheet

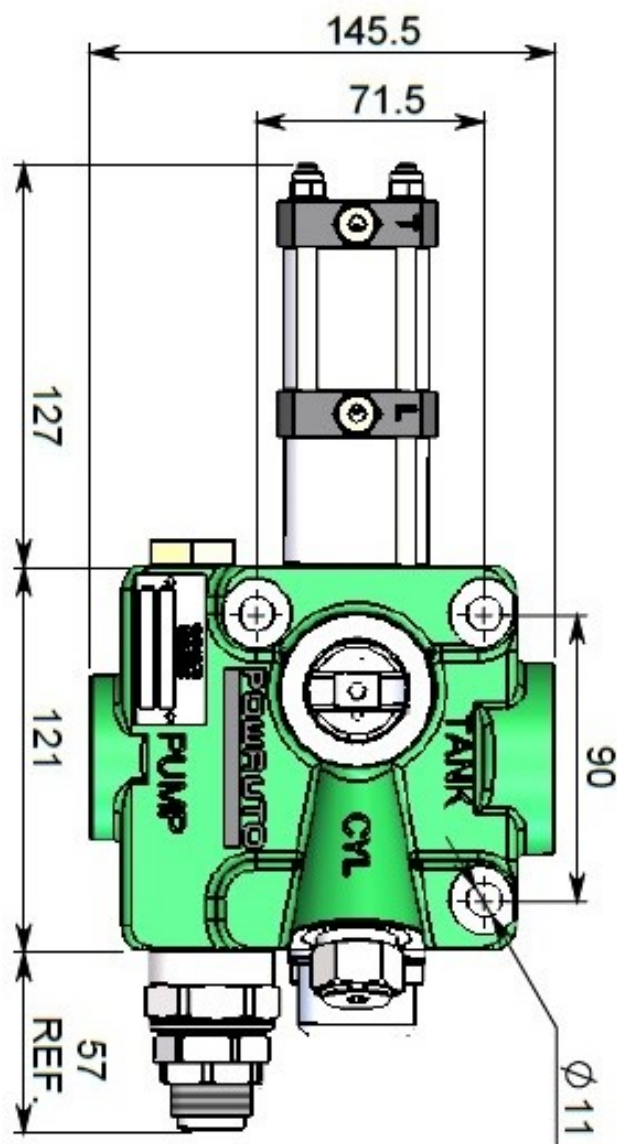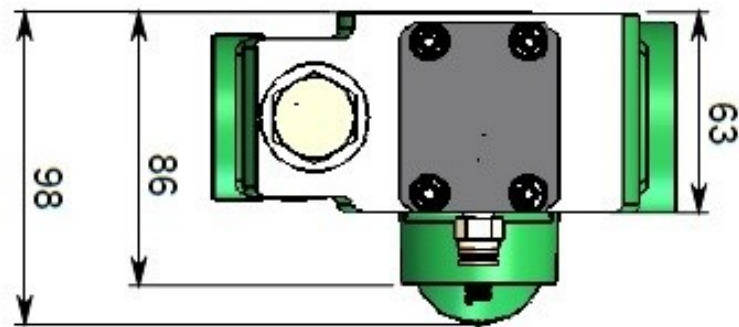

HYDRECO
a member of **DAIKIN** group



www.hydreco.com

Technical Data Sheet

Doc: VAI05—08/24



HYDRECO
*a member of **DAIKIN** group*



www.hydreco.com